


WIRE MANAGEMENT SOLUTIONS

Wiring Ducts

REACH
CERTIFIED

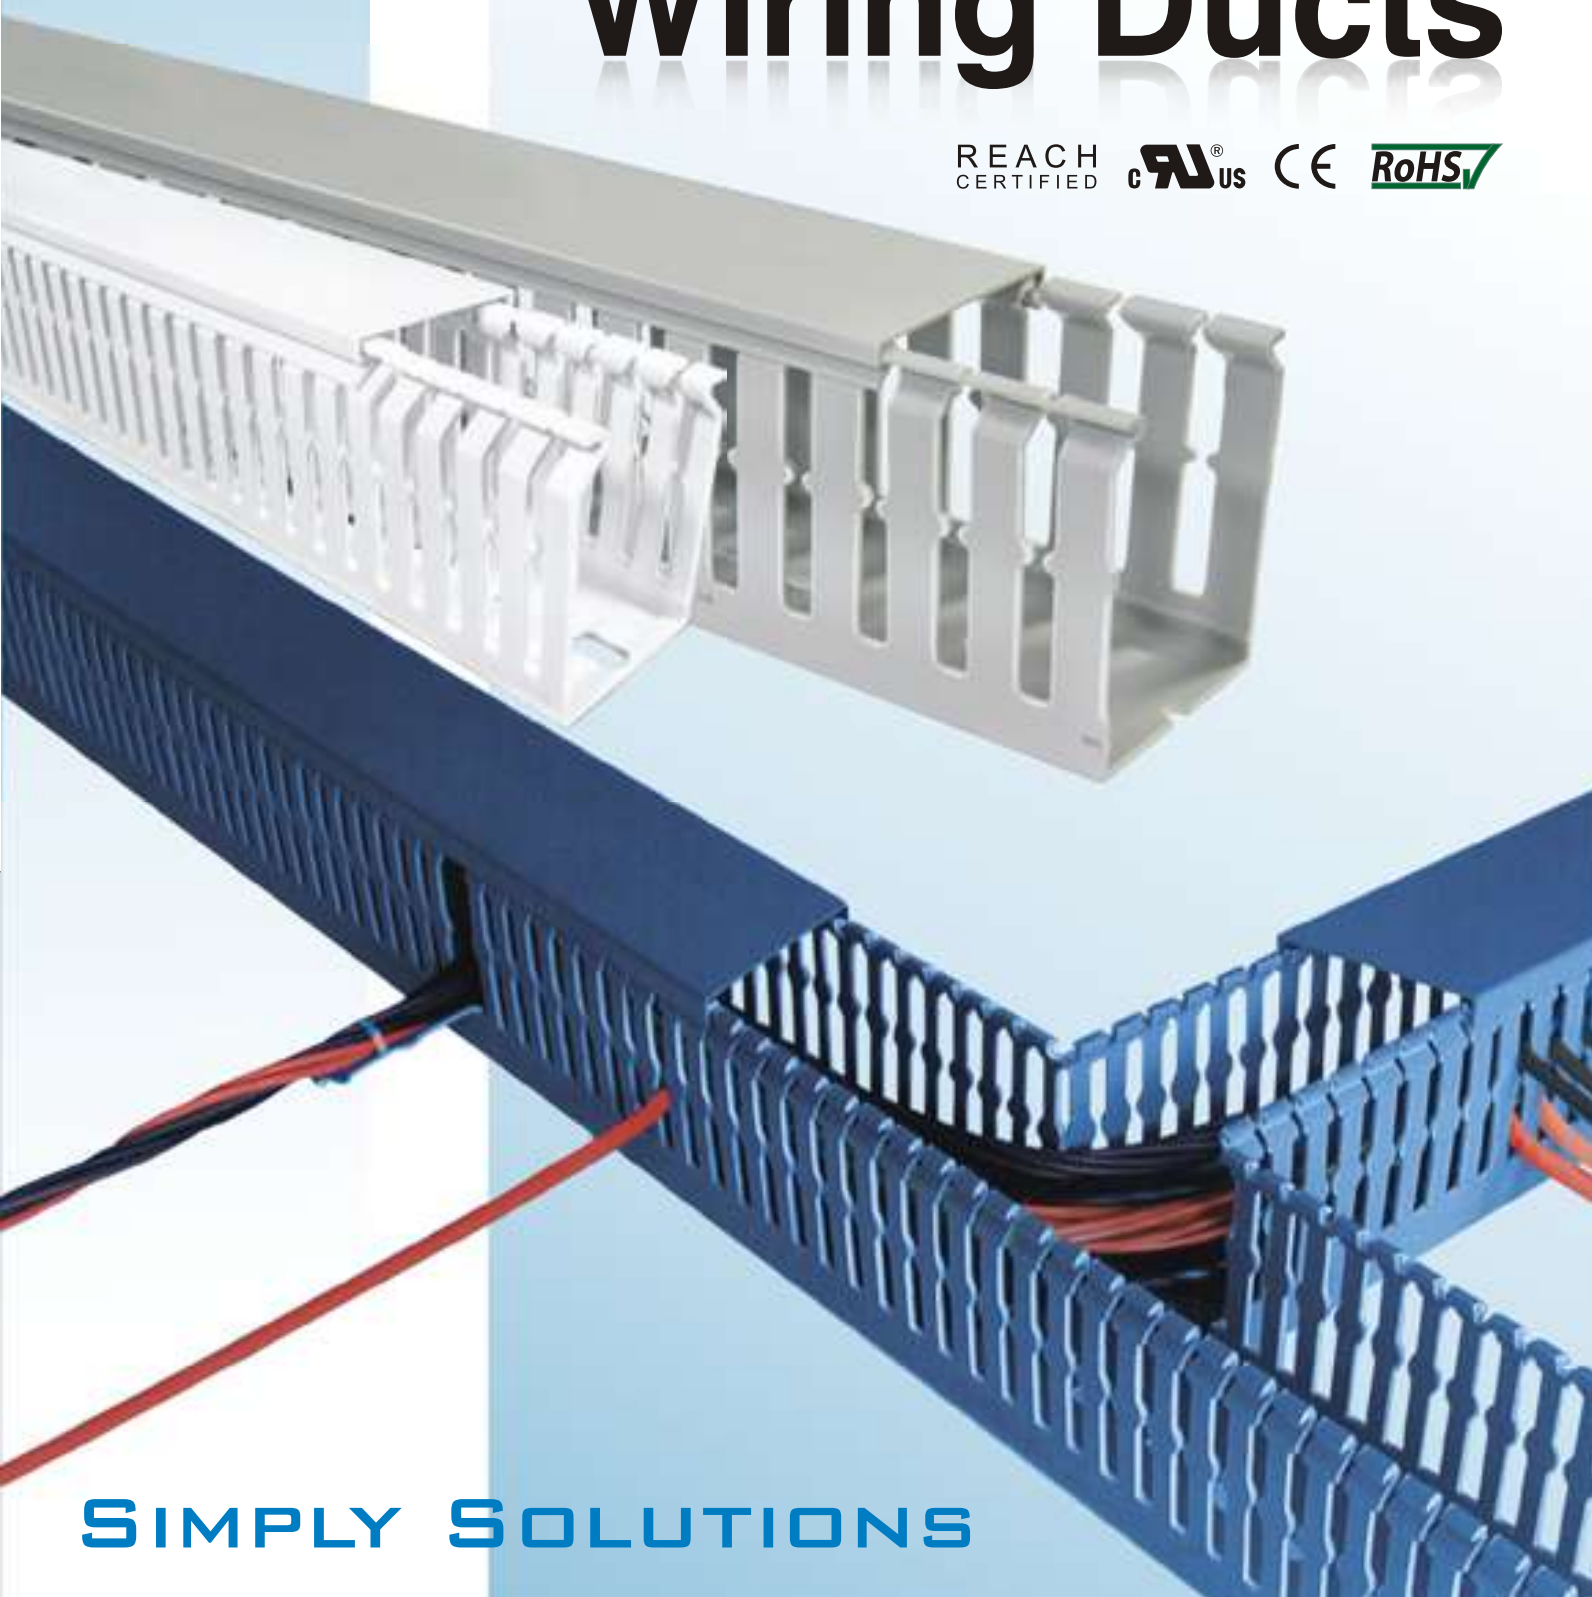

SIMPLY SOLUTIONS



Wiring Ducts

Trinity Touch provides state-of-art Wiring Ducts

Trinity Touch Wiring Ducts are the premium products, available in wide range to accommodate wires and cables for the smallest wall mounted panel to larger integrated systems.



Wiring Ducts - Narrow Slot

Page No. 4



Wiring Ducts - Wide Slot

Page No. 5



Wiring Ducts - Un-Slotted (Solid Wall)

Page No. 6



Halogen Free Wire Management

Page No. 8-10



Tools & Accessories

Page No. 12

Available in all colours

Stocked in 4 colours




Formula for Calculating Fill Capacity

$$\text{Numbers of Wires} = \frac{\text{Duct W x H}}{1.75 \times (\text{Wire O.D.})^2/2}$$





Duct Wire Calculator
also available on website

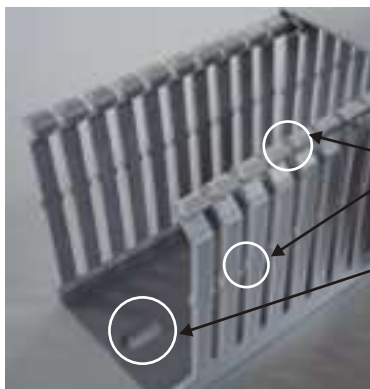

Double Restricted Slot

Mounting Hole Pattern
According to DIN 43659

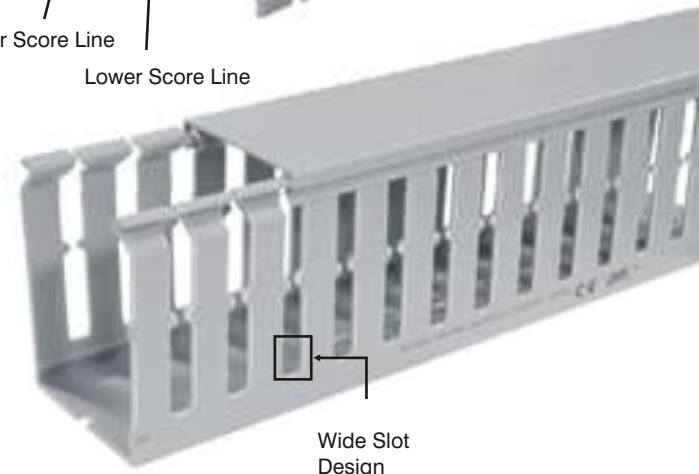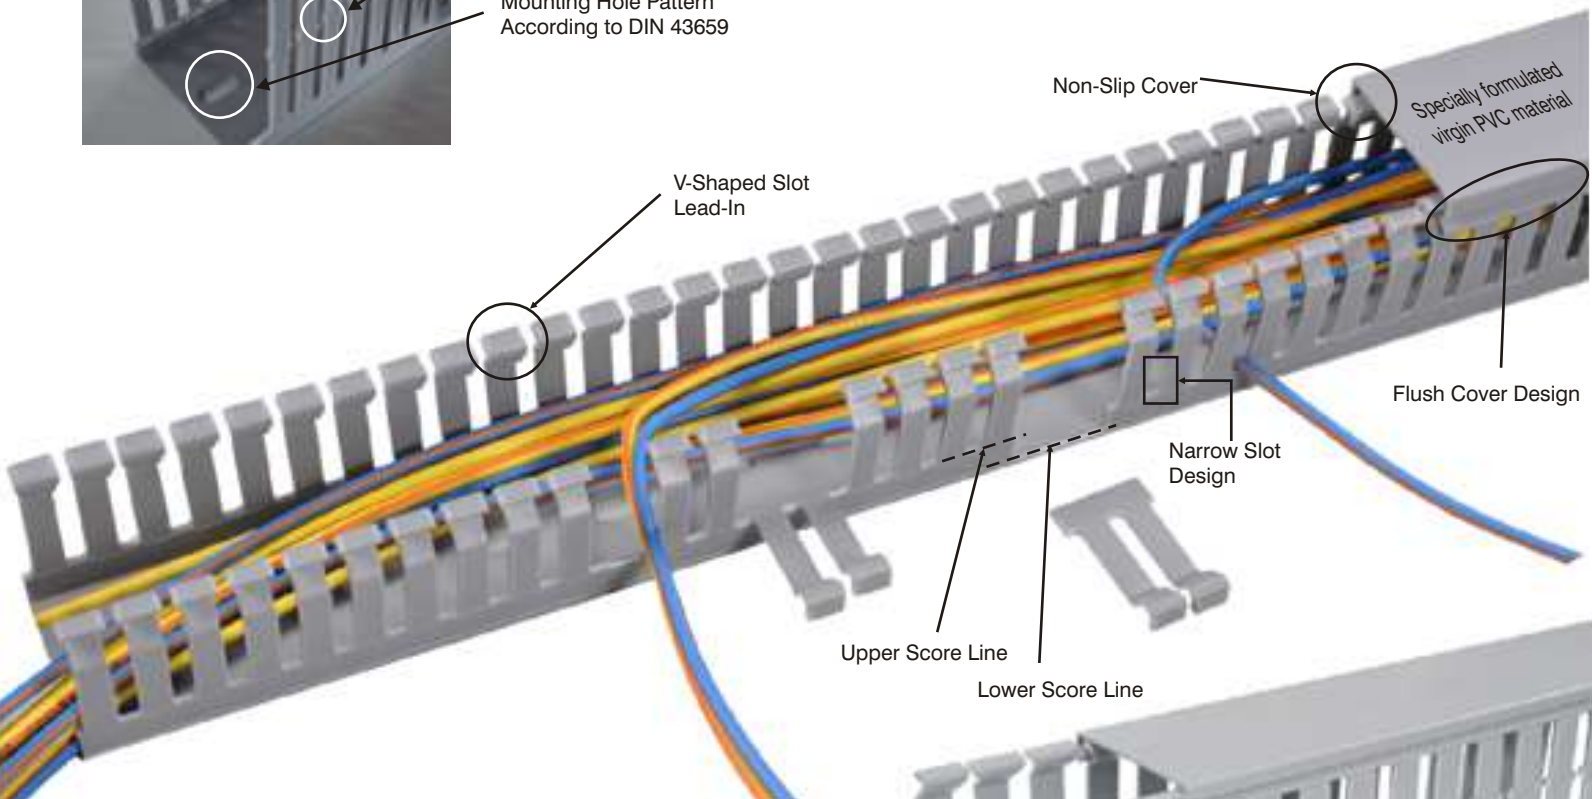

REACH
CERTIFIED

UL
US

CE

RoHS

Wiring Ducts - Narrow Slot

REACH
CERTIFIED



Article No.	Type	Description	Double Restricted Slot *	Duct Size WxH (mm)	Duct Size WxH (inch)	Meter/Box
01 17 00653	TWDN25X25LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	-	25 x 25	0.98 x 0.98	120
01 17 00629	TWDN25X40LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	-	25 x 40	0.98 x 1.57	96
01 17 01658	TWDN25X45LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	-	25 x 45	0.98 x 1.77	96
01 17 00657	TWDN25X60LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	25 x 60	0.98 x 2.36	72
01 17 01660	TWDN25X80LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	25 x 80	0.98 x 3.15	48
01 17 01656	TWDN25X100LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	25 x 100	0.98 x 3.94	48
01 17 00661	TWDN30X80LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	30 x 80	1.18 x 3.15	40
01 17 00633	TWDN40X40LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	-	40 x 40	1.57 x 1.57	64
01 17 00637	TWDN40X60LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	40 x 60	1.57 x 2.36	48
01 17 00641	TWDN40X80LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	40 x 80	1.57 x 3.15	32
01 17 00677	TWDN40X100LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	40 x 100	1.57 x 3.94	32
01 17 01662	TWDN45X45LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	-	45 x 45	1.77 x 1.77	64
01 17 04070	TWDN45X60LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	45 x 60	1.77 x 2.36	48
01 17 01664	TWDN60X40LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	-	60 x 40	2.36 x 1.57	36
01 17 05296	TWDN60X45LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	-	60 x 45	2.36 x 1.77	36
01 17 00645	TWDN60X60LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	60 x 60	2.36 x 2.36	36
01 17 00649	TWDN60X80LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	60 x 80	2.36 x 3.15	24
01 17 00669	TWDN60X100LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	60 x 100	2.36 x 3.94	24
01 17 01668	TWDN80X40LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	-	80 x 40	3.15 x 1.57	24
01 17 01670	TWDN80X60LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	80 x 60	3.15 x 2.36	24
01 17 00665	TWDN80X80LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	80 x 80	3.15 x 3.15	16
01 17 01666	TWDN80X100LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	80 x 100	3.15 x 3.94	16
01 17 01654	TWDN100X60LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	100 x 60	3.94 x 2.36	24
01 17 00678	TWDN100X80LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	100 x 80	3.94 x 3.15	16
01 17 00673	TWDN100X100LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	100 x 100	3.94 x 3.94	16
01 17 02680	TWDN120X80LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	120 x 80	4.72 x 3.15	16
01 17 05298	TWDN150x100LG2	Wiring Duct Narrow Slot, Light Grey, 2 Meter	✓	150 x 100	5.90 x 3.94	6

Wiring Ducts also available in 1 meter with different colours.

Wiring Ducts - Wide Slot

REACH
CERTIFIED



Article No.	Type	Description	Double Restricted Slot *	Duct Size WxH (mm)	Duct Size WxH (inch)	Meter/Box
01 17 02585	TWDW25X25LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	-	25 x 25	0.98 x 0.98	120
01 17 02586	TWDW25X40LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	-	25 x 40	0.98 x 1.57	96
01 17 02587	TWDW25X45LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	-	25 x 45	0.98 x 1.77	96
01 17 02588	TWDW25X60LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	25 x 60	0.98 x 2.36	72
01 17 02589	TWDW25X80LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	25 x 80	0.98 x 3.15	48
01 17 02590	TWDW25X100LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	25 x 100	0.98 x 3.94	48
01 17 02591	TWDW30X80LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	30 x 80	1.18 x 3.15	40
01 17 02592	TWDW40X40LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	-	40 x 40	1.57 x 1.57	64
01 17 02593	TWDW40X60LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	40 x 60	1.57 x 2.36	48
01 17 02594	TWDW40X80LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	40 x 80	1.57 x 3.15	32
01 17 02595	TWDW40X100LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	40 x 100	1.57 x 3.94	32
01 17 02596	TWDW45X45LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	-	45 x 45	1.77 x 1.77	64
01 17 04074	TWDW45X60LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	45 x 60	1.77 x 2.36	48
01 17 02597	TWDW60X40LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	-	60 x 40	2.36 x 1.57	36
01 17 05297	TWDW60X45 LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	-	60 x 45	2.36 x 1.77	36
01 17 02598	TWDW60X60LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	60 x 60	2.36 x 2.36	36
01 17 02599	TWDW60X80LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	60 x 80	2.36 x 3.15	24
01 17 02600	TWDW60X100LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	60 x 100	2.36 x 3.94	24
01 17 02601	TWDW80X40LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	-	80 x 40	3.15 x 1.57	24
01 17 02602	TWDW80X60LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	80 x 60	3.15 x 2.36	24
01 17 02603	TWDW80X80LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	80 x 80	3.15 x 3.15	16
01 17 02604	TWDW80X100LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	80 x 100	3.15 x 3.94	16
01 17 02605	TWDW100X60LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	100 x 60	3.94 x 2.36	24
01 17 02682	TWDW100X80LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	100 x 80	3.94 x 3.15	16
01 17 02606	TWDW100X100LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	100 x 100	3.94 x 3.94	16
01 17 02684	TWDW120X80LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	120 x 80	4.72 x 3.15	16
01 17 05307	TWDW150X100LG2	Wiring Duct Wide Slot, Light Grey, 2 Meter	✓	150 x 100	5.90 x 3.94	6

Wiring Ducts also available in 1 meter with different colours.

Wiring Ducts - Un-Slotted (Solid Wall)

REACH
CERTIFIED



Article No.	Type	Description	Duct Size WxH (mm)	Duct Size WxH (inch)	Meter/Box
01 17 00651	TWDS25X25LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	25 x 25	0.98 x 0.98	120
01 17 00628	TWDS25X40LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	25 x 40	0.98 x 1.57	96
01 17 01676	TWDS25X45LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	25 x 45	0.98 x 1.77	96
01 17 00655	TWDS25X60LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	25 x 60	0.98 x 2.36	72
01 17 01678	TWDS25X80LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	25 x 80	0.98 x 3.15	48
01 17 01674	TWDS25X100LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	25 x 100	0.98 x 3.94	48
01 17 00659	TWDS30X80LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	30 x 80	1.18 x 3.15	40
01 17 00631	TWDS40X40LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	40 x 40	1.57 x 1.57	64
01 17 00635	TWDS40X60LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	40 x 60	1.57 x 2.36	48
01 17 00639	TWDS40X80LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	40 x 80	1.57 x 3.15	32
01 17 00675	TWDS40X100LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	40 x 100	1.57 x 3.94	32
01 17 01680	TWDS45X45LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	45 x 45	1.77 x 1.77	64
01 17 04072	TWDS45X60LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	45 x 60	1.77 x 2.36	48
01 17 01682	TWDS60X40LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	60 x 40	2.36 x 1.57	36
01 17 05306	TWDS60X45LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	60 x 45	2.36 x 1.77	36
01 17 00643	TWDS60X60LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	60 x 60	2.36 x 2.36	36
01 17 00647	TWDS60X80LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	60 x 80	2.36 x 3.15	24
01 17 00667	TWDS60X100LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	60 x 100	2.36 x 3.94	24
01 17 01686	TWDS80X40LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	80 x 40	3.15 x 1.57	24
01 17 01688	TWDS80X60LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	80 x 60	3.15 x 2.36	24
01 17 00663	TWDS80X80LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	80 x 80	3.15 x 3.15	16
01 17 01684	TWDS80X100LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	80 x 100	3.15 x 3.94	16
01 17 01672	TWDS100X60LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	100 x 60	3.94 x 2.36	24
01 17 02734	TWDS100X80LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	100 x 80	3.94 x 3.15	16
01 17 00671	TWDS100X100LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	100 x 100	3.94 x 3.94	16
01 17 02735	TWDS120X80LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	120 x 80	4.72 x 3.15	16
01 17 05308	TWDS150X100LG2	Wiring Duct Solid Wall, Light Grey, 2 Meter	150 x 100	5.90 x 3.94	6

Wiring Ducts also available in 1 meter with different colours.

Halogen Free for Highest Safety

Maximum reliability for sensitive environment

HALOGEN FREE WIRE MANAGEMENT

Why change FROM Polyvinyl Chloride (PVC) TO Low Smoke Zero Halogen (LSZH) products?

When PVC or other traditional plastics ignite in a fire, they emit corrosive & toxic gases like Chlorine. Moreover, these are soluble in moisture, forming Hydrochloric acid, which destroy electronics, semiconductors and intrinsic electrical circuits.

While smoke travels containing toxic element, it can be fatally hazardous to humans if they cannot escape from that area. Toxic fumes are not only a serious health risk but also cause serious damage and problems to crucial machineries and intrinsic devices.

Halogen Free wires and cables are already compulsory in many areas as they are safer. In the same way, Halogen free wiring duct is most important within enclosed spaces where the exits are limited; such as Public Transport, Hospitals, Malls etc. What is the use of Halogen free cables if the wiring ducts contain dangerous material?

For example: Hospitals, Airport Terminals, Concert Halls, Sports Stadiums, Railway Stations, Ships, Offshore Oil and Gas platforms, Multistory Buildings and Nuclear Power.

Wide Acceptability

Trinity Touch halogen free wiring ducts are outstanding not only for high quality standards and superior technical characteristics. But also, for the variety of models and proven easy installation.



REACH CERTIFIED CE RoHS

LSZH material properties - Unique PC/ABS blend

Our halogen free wiring ducts are made from a special purpose LSZH and flame retardant PC/ABS blend containing **NO Bromide, NO Chlorine and NO Fluorine**. It still offers high impact strength and excellent characteristics used for higher temperature applications. These are in compliance with Standard VDE 0472/815 for wiring ducts.

LSZH material also has characteristics of self extinguishing, UL94 flammability rating of V-0 for continuous use temperatures up to 203°F (95°C), it is RoHS (Lead Free) compliant, environmentally safe and is 20% lighter than PVC.

Our LSZH material is resistance to abnormal heat and fire. it has proven dimensional stability between -40 and +100 °C. The halogen free wiring ducts are manufactured in compliance with the Standard EN 50085-2-3. Ideal for application where public safety during a fire is a concern.

Conform to : EN 50085 -2 -3, UL-94V0, RoHS, DIN 43659
Color : Silver Grey

Halogen Free Wiring Ducts - Narrow Slot

REACH CERTIFIED  



Article No.	Type	Description	Double Restricted Slot *	Duct Size WxH (mm)	Duct Size WxH (inch)	Meter/Box
01 17 03447	HF25X40SG2N	Halogen Free Narrow Slot, Silver Grey, 2 Meter	-	25 x 40	0.98 x 1.57	96
01 17 05299	HF25X80SG2N	Halogen Free Narrow Slot, Silver Grey, 2 Meter	✓	25 x 80	0.98 x 3.15	24
01 17 03438	HF40X40SG2N	Halogen Free Narrow Slot, Silver Grey, 2 Meter	-	40 x 40	1.57 x 1.57	64
01 17 05240	HF40X60SG2N	Halogen Free Narrow Slot, Silver Grey, 2 Meter	✓	40 x 60	1.57 x 2.36	24
01 17 03465	HF40X80SG2N	Halogen Free Narrow Slot, Silver Grey, 2 Meter	✓	40 x 80	1.57 x 3.15	32
01 17 03456	HF40X100SG2N	Halogen Free Narrow Slot, Silver Grey, 2 Meter	✓	40 x 100	1.57 x 3.94	32
01 17 03487	HF60X80SG2N	Halogen Free Narrow Slot, Silver Grey, 2 Meter	✓	60 x 80	2.36 x 3.15	24
01 17 03496	HF60X100SG2N	Halogen Free Narrow Slot, Silver Grey, 2 Meter	✓	60 x 100	2.36 x 3.94	24
01 17 03474	HF80X80SG2N	Halogen Free Narrow Slot, Silver Grey, 2 Meter	✓	80 x 80	3.15 x 3.15	16
01 17 03505	HF80X100SG2N	Halogen Free Narrow Slot, Silver Grey, 2 Meter	✓	80 x 100	3.15 x 3.94	16
01 17 03514	HF100X100SG2N	Halogen Free Narrow Slot, Silver Grey, 2 Meter	✓	100 x 100	3.94 x 3.94	16

Halogen Free Wiring Ducts - Wide Slot

REACH CERTIFIED  



Article No.	Type	Description	Double Restricted Slot *	Duct Size WxH (mm)	Duct Size WxH (inch)	Meter/Box
01 17 03449	HF25X40SG2W	Halogen Free Wide Slot, Silver Grey, 2 Meter	-	25 x 40	0.98 x 1.57	96
01 17 05300	HF25X80SG2W	Halogen Free Wide Slot, Silver Grey, 2 Meter	✓	25 x 80	0.98 x 3.15	24
01 17 03440	HF40X40SG2W	Halogen Free Wide Slot, Silver Grey, 2 Meter	-	40 x 40	1.57 x 1.57	64
01 17 05302	HF40X60SG2W	Halogen Free Wide Slot, Silver Grey, 2 Meter	✓	40 x 60	1.57 x 2.36	24
01 17 03467	HF40X80SG2W	Halogen Free Wide Slot, Silver Grey, 2 Meter	✓	40 x 80	1.57 x 3.15	32
01 17 03458	HF40X100SG2W	Halogen Free Wide Slot, Silver Grey, 2 Meter	✓	40 x 100	1.57 x 3.94	32
01 17 03489	HF60X80SG2W	Halogen Free Wide Slot, Silver Grey, 2 Meter	✓	60 x 80	2.36 x 3.15	24
01 17 03498	HF60X100SG2W	Halogen Free Wide Slot, Silver Grey, 2 Meter	✓	60 x 100	2.36 x 3.94	24
01 17 03476	HF80X80SG2W	Halogen Free Wide Slot, Silver Grey, 2 Meter	✓	80 x 80	3.15 x 3.15	16
01 17 03507	HF80X100SG2W	Halogen Free Wide Slot, Silver Grey, 2 Meter	✓	80 x 100	3.15 x 3.94	16
01 17 03516	HF100X100SG2W	Halogen Free Wide Slot, Silver Grey, 2 Meter	✓	100 x 100	3.94 x 3.94	16

Halogen Free Wiring Ducts - Un-Slotted (Solid Wall)

REACH
CERTIFIED



RoHS





Article No.	Type	Description	Duct Size WxH (mm)	Duct Size WxH (inch)	Meter/Box
01 17 03448	HF25X40SG2S	Halogen Free Solid Wall, Silver Grey, 2 Meter	25 x 40	0.98 x 1.57	96
01 17 05303	HF25X80SG2S	Halogen Free Solid Wall, Silver Grey, 2 Meter	25 x 80	0.98 x 3.15	24
01 17 03439	HF40X40SG2S	Halogen Free Solid Wall, Silver Grey, 2 Meter	40 x 40	1.57 x 1.57	64
01 17 05302	HF40X60SG2S	Halogen Free Solid Wall, Silver Grey, 2 Meter	40 x 60	1.57 x 2.36	24
01 17 03466	HF40X80SG2S	Halogen Free Solid Wall, Silver Grey, 2 Meter	40 x 80	1.57 x 3.15	32
01 17 03457	HF40X100SG2S	Halogen Free Solid Wall, Silver Grey, 2 Meter	40 x 100	1.57 x 3.94	32
01 17 03488	HF60X80SG2S	Halogen Free Solid Wall, Silver Grey, 2 Meter	60 x 80	2.36 x 3.15	24
01 17 03497	HF60X100SG2S	Halogen Free Solid Wall, Silver Grey, 2 Meter	60 x 100	2.36 x 3.94	24
01 17 03475	HF80X80SG2S	Halogen Free Solid Wall, Silver Grey, 2 Meter	80 x 80	3.15 x 3.15	16
01 17 03506	HF80X100SG2S	Halogen Free Solid Wall, Silver Grey, 2 Meter	80 x 100	3.15 x 3.94	16
01 17 03515	HF100X100SG2S	Halogen Free Solid Wall, Silver Grey, 2 Meter	100 x 100	3.94 x 3.94	16

Typical Raw Material Properties of Halogen Free Wiring Ducts

Property	Units	ASTM Test	Test Value
Specific Gravity	...	D792	1.2
IZOD Impact Strength	cm-kgf/cm	D256	70
Flexural Strength	psi	D790	12800
Flexural Module	psi	D790	360000
Tensile Strength	psi	D638	7800
Compressive Strength	psi	D695	16000
Water Absorption, (23°C/Sat)	%	D570	0.6
Hardness	Rockwell	ISO 2039-2	124
Dielectric Strength 50Hz, 25°C	KV/mm	D149	400
Dielectric Constant, Dry	...	D150	2.65
HDT	°C	D648	100°C
Vicat Softening Temp.	°C	ASTM D 1525	110°C
Flammability	...	UL-94	V0
Oxygen Index	%	ISO 4589-2	37
Ambient Temperature (Operation)	°C	...	(-25°C to +90°C)

Subject to change in the interest of technical progress.

Technical Information

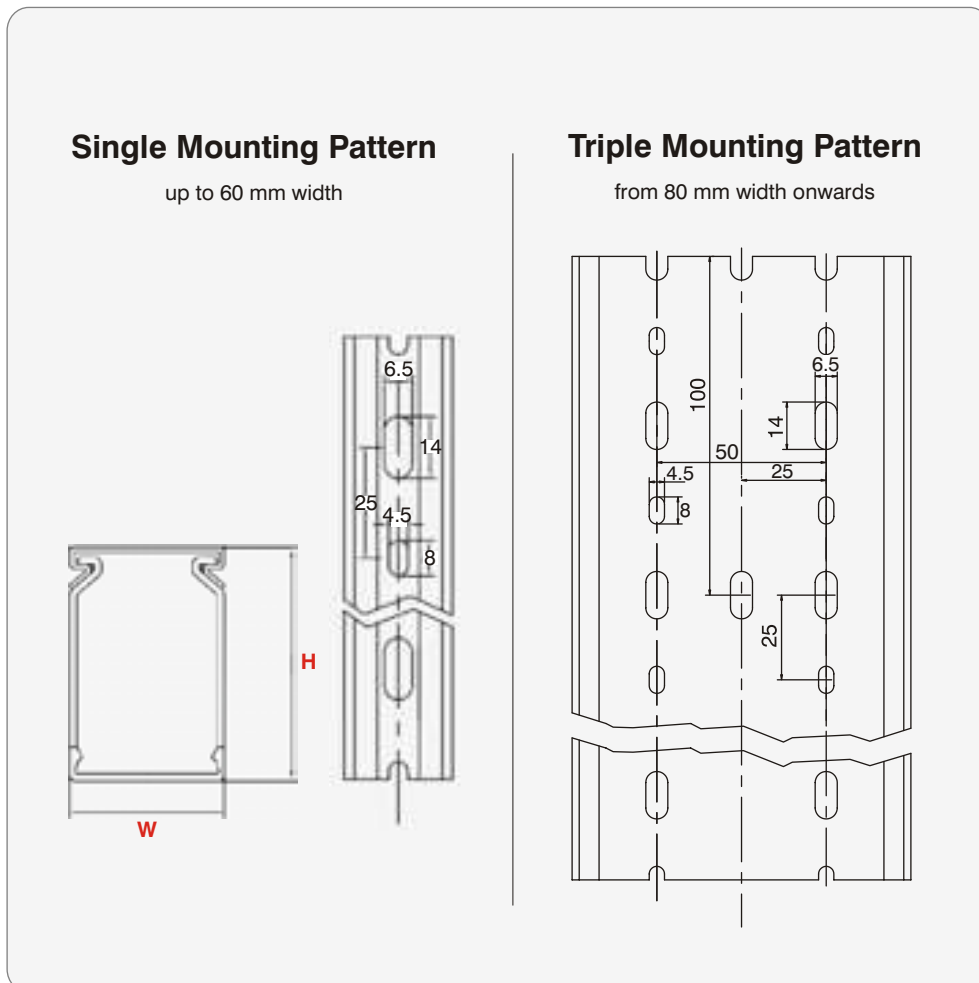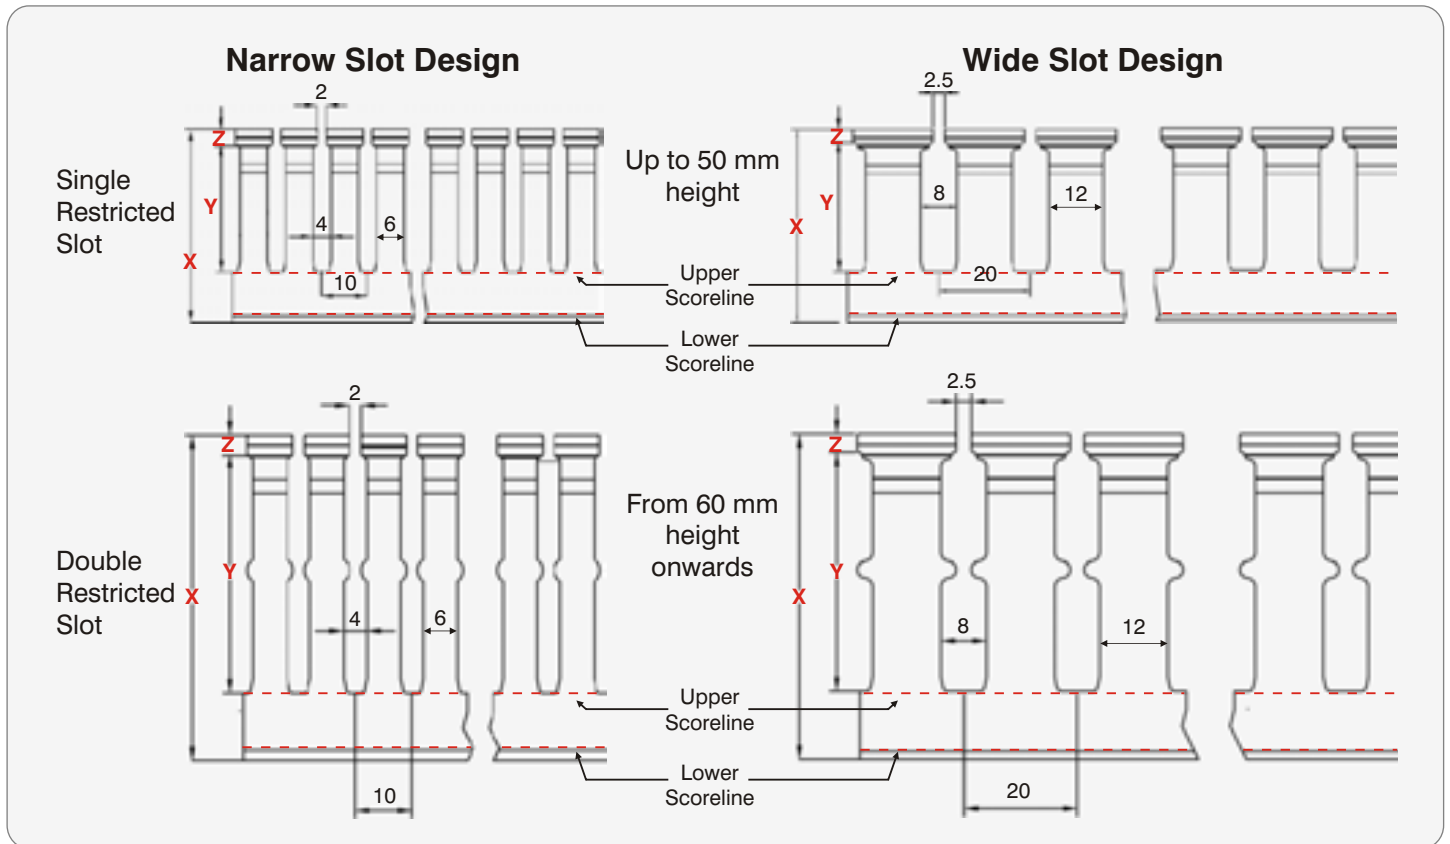

Nominal Duct Size (mm)		Dimensions (mm)			
W (Width)	H (Height)	T (Thickness)	X	Y	Z
25	25	1.6	22.20	11.80	3.40
25	40	1.6	37.20	23.30	3.40
25	45	1.6	42.20	27.80	3.40
25	60	1.9	57.50	42.20	3.30
25	80	2.2	77.80	61.00	3.30
25	100	2.1	98.00	79.00	3.90
30	80	2.2	77.80	61.00	3.30
40	40	1.6	37.20	23.30	3.40
40	60	1.9	57.50	42.20	3.30
40	80	2.2	77.80	61.00	3.30
40	100	2.4	98.00	79.00	3.90
45	45	1.6	42.20	27.80	3.40
45	60	1.9	57.50	42.20	3.30
60	40	1.6	37.20	23.30	3.40
60	45	1.6	42.20	27.80	3.40
60	60	1.9	57.50	42.20	3.30
60	80	2.2	77.80	61.00	3.30
60	100	2.4	98.00	79.00	3.90
80	40	1.6	37.20	23.30	3.40
80	60	1.9	57.50	42.20	3.30
80	80	2.3	77.80	61.00	3.30
80	100	2.5	98.00	79.00	3.90
100	60	1.9	57.50	42.20	3.20
100	80	2.4	77.80	61.00	3.30
100	100	2.5	98.00	79.00	3.90
120	80	2.5	77.80	61.00	3.30
150	100	2.5	98.00	79.00	3.90

For sizes please correspond the alphabets in design with the alphabets in the above table.

Tools and Accessories



Article No.	Type	Description	Pcs./Box
01 17 00687	TRIT	Rivet Installation Tool	1
01 17 00688	TWTCT	Wiring Duct Cutting Tool	1
01 17 00689	TNR	Rivet	100

Trinity Touch (EUROPE) Ltd.

www.trinitytouch.co.uk

Unit-L, Tyson Courtyard, Weldon South Industrial Estate, Corby,
Northants, N N18 8AZ, UK
Telephone: +44 (0) 1536 400 641
Fax: +44 (0) 1536 268 043
E-mail: gbsales@trinitytouch.com

Distributed By :